

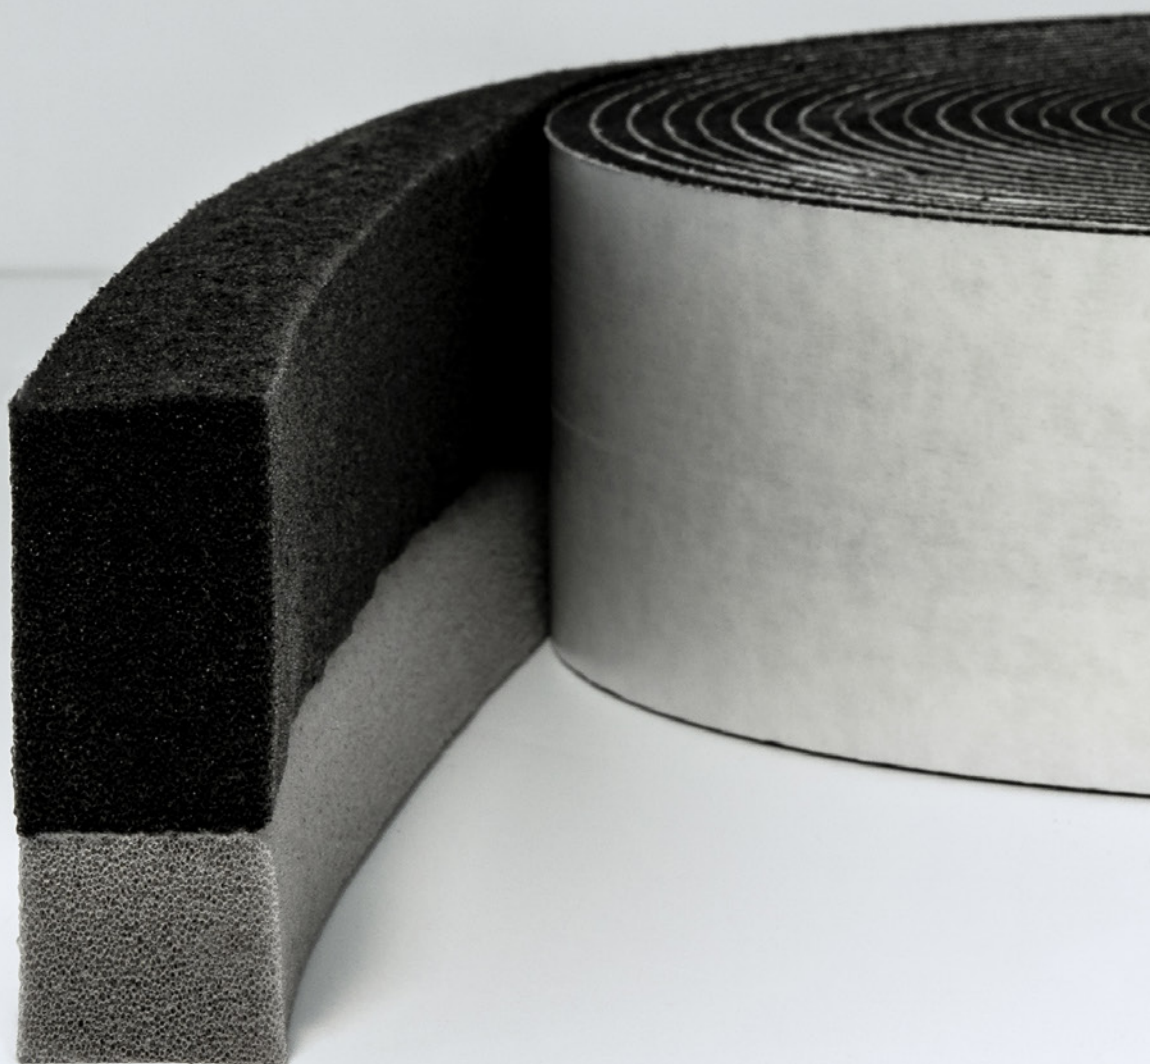



Possible joint dimensions
for the blaugelb Multifunctional Tape Trio **SDL**⁷⁵⁰
Issue 2024

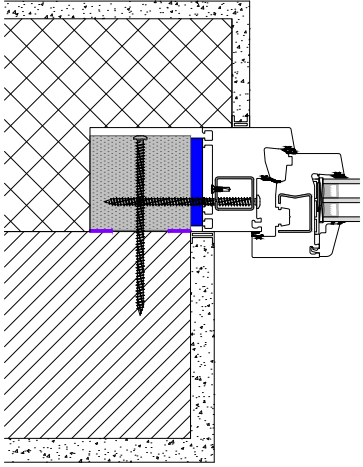

Areas of use vs. requirement for sealing in accordance with DIN 18542:2019

<p>Watertightness against driving rain 750 Pa</p> 	<p>Watertightness against driving rain 600 Pa</p> 	<p>Without requirement for watertightness against driving rain</p> 
<p>Unprotected application on the exterior side</p>	<p>Protected application on the exterior side</p>	<p>Application behind fitting</p>
<p>No plaster, strip or insulation</p>	<p>Plastered over, strip or insulation</p>	<p>Without weather protection</p>
<p>High stress with driving rain, wind and UV e.g. timber framework or on the coast</p>	<p>Low stress with driving rain, wind and UV</p>	<p>No stress with driving rain, wind and UV</p>
<p>MF1 / BG1 / BGR</p>	<p>MF2 / BG1 / BGR</p>	<p>MF2 / BG2 / BGR</p>

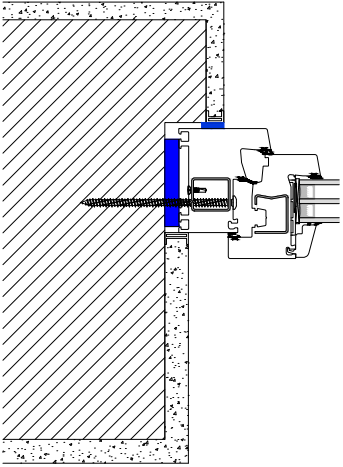

Information on all item numbers and the detailed product information is available directly here or at www.blaugelb.de



“Select the area of use, then the product” – that always used to be the approach.


Thanks to the air-stop technology (membrane) on blaugelb Multifunctional Tape Trio**SDL**⁷⁵⁰, the application area has now been broadened. We have three defined areas of use with the respective joint widths – and all this with just one product.

Which joint dimensions can be covered with the tape?

Requirements with feasible joint dimensions

Tape dimension		750 Pa	600 Pa	Old building
30	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
35	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
40	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
54	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
	9 – 24 mm	9 – 24 mm	9 – 30 mm	9 – 37 mm
64	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
	9 – 24 mm	9 – 24 mm	9 – 30 mm	9 – 37 mm
74	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
	9 – 24 mm	9 – 24 mm	9 – 30 mm	9 – 37 mm
84	4 – 11 mm	4 – 11 mm	4 – 17 mm	4 – 24 mm
	6 – 17 mm	6 – 17 mm	6 – 23 mm	6 – 30 mm
	9 – 24 mm	9 – 24 mm	9 – 30 mm	9 – 37 mm

Construction-related deviation of the tape colouring

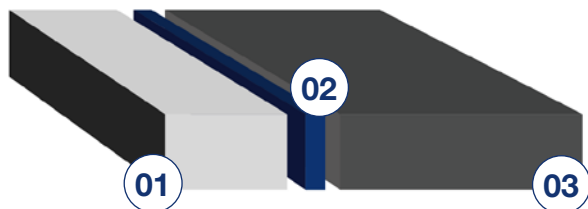

01. Special impregnated PUR soft foam light grey, inside
02. Membrane, air-stop technology
03. Special impregnated PUR soft foam anthracite, outside



Expert. Honest. Reliable.

For more information, visit
www.blaugelb.de