


Plinth Thermal Insulation Profile PVC/TK REHAU for BT 70

For perfect insulation results.

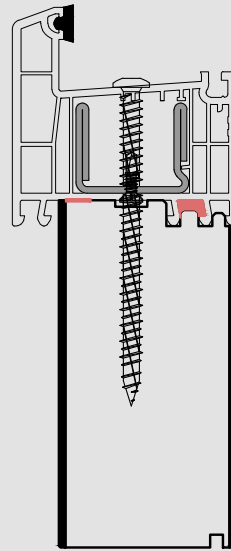

Product features:

The blaugelb Plinth Thermal Insulation Profile PVC/TK made of a TK core (thermoplastic resin) and a two-sided 2 mm PVC top layer (polyvinyl chloride) offers the best possible heat and moisture protection on balcony doors made of plastic, aluminium, wood and wood/aluminium. The blaugelb Plinth Thermal Insulation Profile PVC/TK is sturdy, durable and is exceptionally quick and easy to fit. The blaugelb Plinth Thermal Insulation Profile PVC/TK enables thermal separation and reduces potential thermal bridges compared to conventional plastic profiles with steel reinforcement. It is dimensionally stable, 100 % free of HCFCs, HFCs and HBCDs.

The blaugelb Plinth Thermal Insulation Profile PVC/TK was specially developed for fitting as a floor recess profile under frames for floor-level elements. The profile-specific Plinth Thermal Insulation Profiles PVC/TK can be produced at heights of 30 to 300 mm. By virtue of the innovative dovetail joint, the blaugelb Plinth Thermal Insulation Profiles PVC/TK can be positively interlocked to create any desired length. The dovetail joint optimises waste, in some cases avoiding waste altogether.

- Effective insulation offering high potential savings
- Permanently eliminates energy weak points on components
- Prevents damage caused by moisture and mould
- High load transfer and low weight
- Force-locking screwing in the frame structure

Due to the milled tongue and groove joint, it is possible to adapt the profile-specific Plinth Thermal Insulation Profile PVC/TK with profile-independent plinth thermal insulation profiles. The profiles which are to be joined have a groove on one edge and a tongue on the other edge and can be coupled in height one under the other.

The contoured mount guarantees quick and easy installation of the profile with the blaugelb Frame Screw Fix FK-T30 and precise positioning thanks to the contour cutting. This prevents the formation of a hollow chamber between the plinth thermal insulation profile and the frame, and airtightness is achieved thanks to the process-safe sealing.

Product benefits:

- effective insulation offering high potential savings
- permanently eliminates energy weak points on components installed on floor slabs and enhances indoor comfort
- prevents damage caused by moisture and mould
- high load transfer, low weight
- force-locking screwing in the frame structure
- UV-resistant PVC top layer
- tested to be very low in emissions according to EMICODE® EC1 Plus

Technical data:

Surface and top layer:	On both sides 2 mm PVC white
Material:	Thermoplastic resin (TK)
Compressive load bearing capacity at 60 x 40 mm: (blaugelb Spacer Block)	4,440 N
Compressive load bearing capacity at 170 x 53 mm: (blaugelb Shim Block HST)	16,669 N
Compressive load bearing capacity at 210 x 53 mm: (blaugelb Shim Block HST)	20,628 N
Fire behaviour: DIN 4102-1:1998-05	B2
Fire behaviour: DIN EN 13501-1:2019-05	CLASS E
Thermal transmittance value U-value at 55 mm:	0.696 W/m ² K
Thermal transmittance value U-value at 60 mm:	0.641 W/m ² K
Dimensional stability:	Very high, including outdoor weathering
Water absorption after 28 days under water: DIN 12087	≤ 0.5 vol. %
Screw withdrawal values: blaugelb Frame Screw Fix FK-T30 7.5 x L mm 60 mm screw-in depth	X-axis: F _{FK} 4.06 kN Y-axis: F _{FK} 3.67 kN
UV-resistance of the PVC top layer: DIN EN 513 (irradiation energy 12 GJ/m ² or outdoor weathering over 5 years)	Fastness to weathering and light: No colour variations occur that exceed grey scale grade 4 according to ISO 105-A03
Waste code:	AWV 070213

Product name	PU	Item no.
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 30 x 3000 mm REHAU for BT 70	1 piece	3100006382
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 30 x 4000 mm REHAU for BT 70	1 piece	3100006397
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 40 x 3000 mm REHAU for BT 70	1 piece	3100006383
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 40 x 4000 mm REHAU for BT 70	1 piece	3100006398
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 50 x 3000 mm REHAU for BT 70	1 piece	3100006384
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 50 x 4000 mm REHAU for BT 70	1 piece	3100006399
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 80 x 3000 mm REHAU for BT 70	1 piece	3100006385

Product name	PU	Item no.
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 80 x 4000 mm REHAU for BT 70	1 piece	3100006400
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 100 x 3000 mm REHAU for BT 70	1 piece	3100006386
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 100 x 4000 mm REHAU for BT 70	1 piece	3100006401
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 130 x 3000 mm REHAU for BT 70	1 piece	3100006387
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 130 x 4000 mm REHAU for BT 70	1 piece	3100006402
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 150 x 3000 mm REHAU for BT 70	1 piece	3100006388
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 150 x 4000 mm REHAU for BT 70	1 piece	3100006403
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 160 x 3000 mm REHAU for BT 70	1 piece	3100006389
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 160 x 4000 mm REHAU for BT 70	1 piece	3100006404
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 180 x 3000 mm REHAU for BT 70	1 piece	3100006390
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 180 x 4000 mm REHAU for BT 70	1 piece	3100006405
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 200 x 3000 mm REHAU for BT 70	1 piece	3100006391
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 200 x 4000 mm REHAU for BT 70	1 piece	3100006406
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 220 x 3000 mm REHAU for BT 70	1 piece	3100006392
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 220 x 4000 mm REHAU for BT 70	1 piece	3100006407
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 240 x 3000 mm REHAU for BT 70	1 piece	3100006393
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 240 x 4000 mm REHAU for BT 70	1 piece	3100006408
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 260 x 3000 mm REHAU for BT 70	1 piece	3100006394
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 260 x 4000 mm REHAU for BT 70	1 piece	3100006409
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 280 x 3000 mm REHAU for BT 70	1 piece	3100006395
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 280 x 4000 mm REHAU for BT 70	1 piece	3100006410
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 300 x 3000 mm REHAU for BT 70	1 piece	3100006396
blaugelb Plinth Thermal Insulation Profile PVC/TK 55 x 300 x 4000 mm REHAU for BT 70	1 piece	3100006411
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 30 x 3000 mm REHAU for BT 70	1 piece	3100006412
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 30 x 4000 mm REHAU for BT 70	1 piece	3100006427
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 40 x 3000 mm REHAU for BT 70	1 piece	3100006413
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 40 x 4000 mm REHAU for BT 70	1 piece	3100006428
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 50 x 3000 mm REHAU for BT 70	1 piece	3100006414
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 50 x 4000 mm REHAU for BT 70	1 piece	3100006429
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 80 x 3000 mm REHAU for BT 70	1 piece	3100006415
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 80 x 4000 mm REHAU for BT 70	1 piece	3100006430
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 100 x 3000 mm REHAU for BT 70	1 piece	3100006416
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 100 x 4000 mm REHAU for BT 70	1 piece	3100006431
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 130 x 3000 mm REHAU for BT 70	1 piece	3100006417
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 130 x 4000 mm REHAU for BT 70	1 piece	3100006432


Product name	PU	Item no.
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 150 x 3000 mm REHAU for BT 70	1 piece	3100006418
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 150 x 4000 mm REHAU for BT 70	1 piece	3100006433
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 160 x 3000 mm REHAU for BT 70	1 piece	3100006419
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 160 x 4000 mm REHAU for BT 70	1 piece	3100006434
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 180 x 3000 mm REHAU for BT 70	1 piece	3100006420
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 180 x 4000 mm REHAU for BT 70	1 piece	3100006435
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 200 x 3000 mm REHAU for BT 70	1 piece	3100006421
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 200 x 4000 mm REHAU for BT 70	1 piece	3100006436
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 220 x 3000 mm REHAU for BT 70	1 piece	3100006422
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 220 x 4000 mm REHAU for BT 70	1 piece	3100006437
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 240 x 3000 mm REHAU for BT 70	1 piece	3100006423
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 240 x 4000 mm REHAU for BT 70	1 piece	3100006438
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 260 x 3000 mm REHAU for BT 70	1 piece	3100006424
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 260 x 4000 mm REHAU for BT 70	1 piece	3100006439
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 280 x 3000 mm REHAU for BT 70	1 piece	3100006425
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 280 x 4000 mm REHAU for BT 70	1 piece	3100006440
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 300 x 3000 mm REHAU for BT 70	1 piece	3100006426
blaugelb Plinth Thermal Insulation Profile PVC/TK 60 x 300 x 4000 mm REHAU for BT 70	1 piece	3100006441

Delivery and storage form:


Store in its original packaging. Current packaging: Use of a PE stretch film.

Safety note:

According to the available specifications and guidelines, the product is not a hazardous substance.

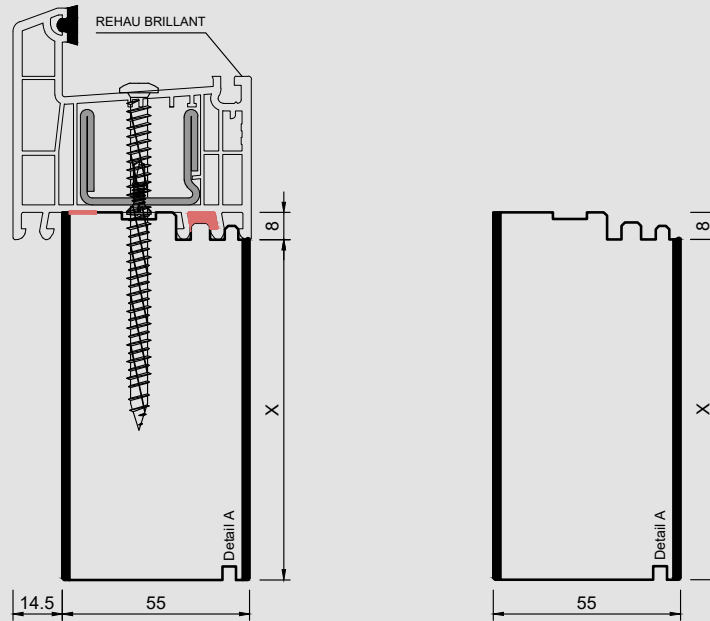

X = 30, 40, 50, 80, 100, 130, 150, 160, 180, 200, 220, 240, 260, 280, 300 mm

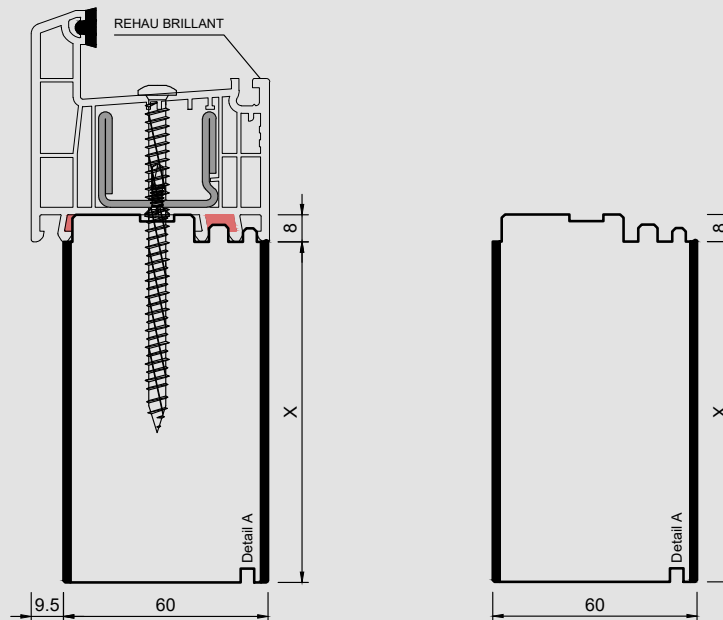

X = 30, 40, 50, 80, 100, 130, 150, 160, 180, 200, 220, 240, 260, 280, 300 mm

The information provided in this document corresponds to the information and technical details available to the best of our knowledge. However, this does not constitute a guarantee pursuant to section 443 of the German Civil Code (BGB). Our processing instructions are to be considered only as general guidelines and may differ in the individual case due to the range of possible uses and applications. They do therefore not automatically exempt the user from carrying out their own tests. We reserve the right to make technical modifications and enhancements at any time.